

h Series

I



Features

- Speed Controller with built-in pilot check valve
- Easy to control the speed of the cylinder

How to order

SPC 06 — 01

6
8
A

1 Series

2 Body Size

4D	28
4F	2:
64	32
68	34

3 Thread


46	p3t
48	p316
4A	p5t
4B	p314

Specifications

Fluid	Compressed Air(M . k)
Operating pressure range	3 A0A 1cm (322 AA2 m)
Negative Pressure	/ 972 e (/ 972 r . / 322 m)
Operating temp.	2 82°C

Cautions

Be sure to have a full understanding before use and refer to safety cautions and common cautions

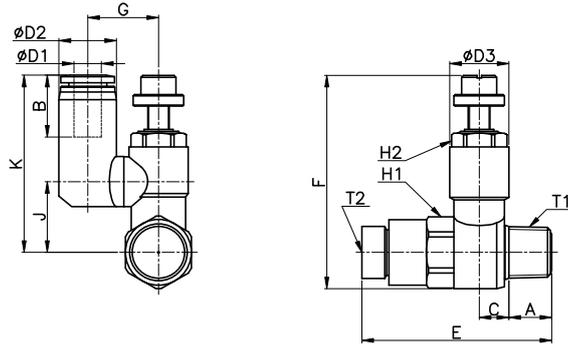


METRIC-BSPT(R)

Unit H


h nMOg	M	J	6	8	K	M6	M8	MA	L	O	P		S	a	e	T6 (T)	T8 (T)	Unit H ()
											h	h						
t L4D146	8	: Ø	p 31	i 7	39Ø	8Ø	34Ø	34Ø	: Ø	57Ø	65Ø	6: Ø	38Ø	360A	5: 0A	34	32	52Ø
t L4D148		32Ø	p 316	p 31		8Ø	34Ø	37Ø	9Ø	64Ø	77Ø	82Ø	3AØ	3: Ø	66Ø	39	35	85Ø
t L4F146	:	: Ø	p 31	i 7	3AØ	: Ø	360A	34Ø	: Ø	57Ø	65Ø	6: Ø	39Ø	360A	5A0	34	32	55Ø
t L4F148		32Ø	p 316	p 31		: Ø	360A	37Ø	9Ø	64Ø	77Ø	82Ø	3: Ø	3: Ø	68Ø	39	35	88Ø
t L4F14A	32	33Ø	p 51	p 31	42Ø	: Ø	37Ø	42Ø	AØ	6AØ	7: Ø	85Ø	45Ø	43Ø	72Ø	3A	39	323Ø
t L6414A		36Ø	p 314	p 316		32Ø	39Ø	42Ø	AØ	6AØ	7: Ø	85Ø	45Ø	43Ø	75Ø	3A	39	327Ø
t L6414B	34	36Ø	p 314	p 316	44Ø	32Ø	39Ø	49Ø	340	7A0	94Ø	9: Ø	48Ø	53Ø	86Ø	46	45	425Ø
t L6814A		33Ø	p 51	p 31		34Ø	42Ø	42Ø	AØ	6AØ	7: Ø	85Ø	45Ø	43Ø	760	3A	39	332Ø
t L6814B		36Ø	p 314	p 316		34Ø	42Ø	49Ø	340	7A0	94Ø	9: Ø	48Ø	53Ø	89Ø	46	45	457Ø

I Flow Graph


t L 4D146
4F146

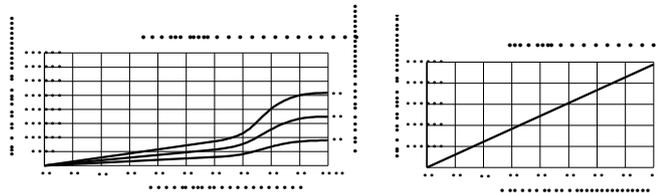

t L 4D148
4F148

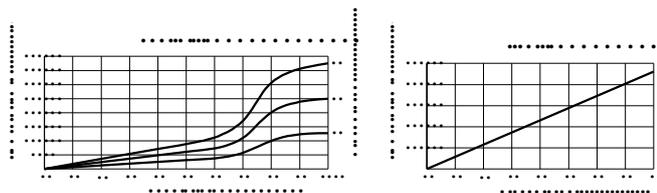

t L 4F14A
6414A
6814A

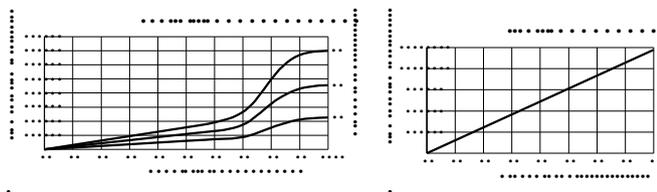

t L 6414B
6814B

